


# MicroMAX EDGE \*\*

High Efficiency Synthetic Minipleat Filter

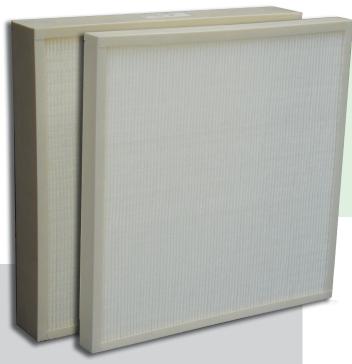

#### Features:

- MERV 11 15 performance rating
- Low resistance to airflow
- Compact design
- Superior pleat stability
- Durable plastic frame
- Incinerable
- Helps meet LEED requirements

The **MicroMAX EDGE**<sup>™</sup> is an all synthetic, durable minipleat panel filter that offers an incredible amount of media area compared to other filters of the same size. The increased media area and high dust holding capacity translate into fewer filter changes. Additionally, the MicroMAX EDGE<sup>™</sup> design allows for lower energy costs as pressure drops remain low for longer periods. The high mechanical efficiency translates into a better level of indoor air quality.

## All-Plastic Compact Design

The MicroMAX EDGE<sup>™</sup> is manufactured in a 4" deep, durable plastic frame designed to replace almost any 12" competitive high efficiency filter. The lightweight all-plastic frame installs easily into side-access housings or front-load holding frames and is an ideal choice to replace bag filters and other heavier box-style rigid filters. The lightweight, compact design also helps lower shipping costs and the need for excess inventory space. It is also a preferred choice in applications where incineration is the desired means of disposal.

### Nano Fiber Media

The **MicroMAX EDGE**<sup>™</sup> features synthetic microfiber filter media with a 3 dimensional, progressive design for optimum dust holding capacities and product strength. The MicroMAX EDGE  $^{\text{™}}$  contains nanofibers integrated into the fiber media, providing the ability to capture the smallest particles. These synthetic fibers are produced in a solvent free, melt-based and environmentally friendly process and do not contain any chemical binder. These fibers also offer the added benefit of being non-shedding.

Koch Filter Corporation...Durable. Reliable. Versatile.

Bulletin No. MME-1




# MicroMAX EDGE Performance Data

Size (inches) Nominal	Size (inches) Actual W x H x D	Capacity (CFM)	Resistance (inches W.G.)		Media Area
WxHxD			MERV 15	MERV 11	(Sq. Ft.)
24 x 24 x 4	23 3/8 x 23 3/8 x 3 3/4	2000	0.38	0.21	110
20 x 25 x 4	19 1/2 x 24 1/2 x 3 3/4	1750	0.38	0.21	95
20 x 24 x 4	19 1/2 x 23 1/2 x 3 3/4	1650	0.38	0.21	91
20 x 20 x 4	19 1/2 x 19 1/2 x 3 3/4	1400	0.38	0.21	76
16 x 25 x 4	15 1/2 x 24 1/2 x 3 3/4	1400	0.38	0.21	76
16 x 20 x 4	15 1/2 x 19 1/2 x 3 3/4	1100	0.38	0.21	61
12 x 24 x 4	11 3/8 x 23 3/8 x 3 3/4	1000	0.38	0.21	55
Size (inches) Nominal	Size (inches) Actual W x H x D	Capacity (CFM)	Resistance (inches W.G.)		Media Area
WxHxD			MERV 14	MERV 12	(Sq. Ft.)
25 x 25 x 2	24 1/2 x 24 1/2 x 1 7/8	2170	0.41	0.26	46


Size (inches) Nominal	Size (inches) Actual W x H x D	Capacity (CFM)	Resistance (inches W.G.)		Media Area
WxHxD			MERV 14	MERV 12	(Sq. Ft.)
25 x 25 x 2	24 1/2 x 24 1/2 x 1 7/8	2170	0.41	0.26	46
24 x 24 x 2	23 1/2 x 23 1/2 x 1 7/8	2000	0.41	0.26	43
20 x 30 x 2	19 1/2 x 29 1/2 x 1 7/8	2085	0.41	0.26	44
20 x 25 x 2	19 1/2 x 24 1/2 x 1 7/8	1750	0.41	0.26	37
20 x 24 x 2	19 1/2 x 23 1/2 x 1 7/8	1650	0.41	0.26	35
20 x 20 x 2	19 1/2 x 19 1/2 x 1 7/8	1400	0.41	0.26	29
18 x 25 x 2	17 1/2 x 24 1/2 x 1 7/8	1570	0.41	0.26	33
18 x 24 x 2	17 1/2 x 23 1/2 x 1 7/8	1500	0.41	0.26	32
18 x 20 x 2	17 1/2 x 19 1/2 x 1 7/8	1250	0.41	0.26	26
16 x 25 x 2	15 1/2 x 24 1/2 x 1 7/8	1400	0.41	0.26	29
16 x 24 x 2	15 1/2 x 23 1/2 x 1 7/8	1340	0.41	0.26	28
16 x 20 x 2	15 1/2 x 19 1/2 x 1 7/8	1120	0.41	0.26	23
16 x 16 x 2	15 1/2 x 15 1/2 x 1 7/8	890	0.41	0.26	18
15 x 20 x 2	14 1/2 x 19 1/2 x 1 7/8	1050	0.41	0.26	22
14 x 25 x 2	13 1/2 x 24 1/2 x 1 7/8	1220	0.41	0.26	25
14 x 20 x 2	13 1/2 x 19 1/2 x 1 7/8	980	0.41	0.26	20
12 x 24 x 2	11 1/2 x 23 1/2 x 1 7/8	1000	0.41	0.26	21
12 x 20 x 2	11 1/2 x 19 1/2 x 1 7/8	840	0.41	0.26	17
10 x 20 x 2	9 1/2 x 19 1/2 x 1 7/8	700	0.41	0.26	14
10 x 10 x 2	9 1/2 x 9 1/2 x 1 7/8	350	0.41	0.26	7



- 1. 100% Gradient density synthetic media
- 2. Pleat spacing provided by durable thermally bonded material
- 3. Moisture proof construction
- 4. Durable hard plastic frame
- 5. Filter components are anti-microbial
- 6. Max operating temperature: 180°F and 82°C
- 7. Rated velocity 500 FPM
- 8. Single header version increases resistance by .05

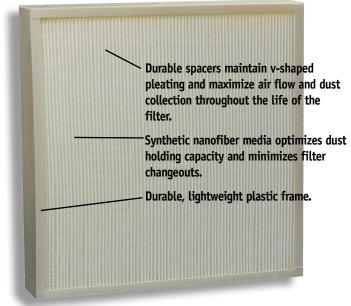

4" Available in Single Header and No Header design.



**Reduces Shipping Costs...** 



Compared with most competitive filters, which are packaged only one-per-carton, **MicroMAX EDGE** $^{\text{m}}$  filters are packaged 3 to a carton.







Improves Indoor Environmental Quality.



Look for the Koch Green icon! Whenever you see the Koch Green

Energy Costs, Extends Filter Lifecycles, Conserves Resources, and

icon, we are identifying a product that meets or exceeds our criteria in one or more of the following categories: Earns LEED Points, Reduces









Filter Services of Indiana 1550 Indiana Ave. Indianapolis, Indiana 46202 317-264-2123



**Koch Filter Corporation** maintains a policy of continuous product research and improvement, and retains the right to change product specification and design without notice.